PROJECT PROFILE:

ITF WEST PARKING STRUCTURE AT LAX

Los Angeles, California



Project Overview

ITF West project, an economy parking deck at Los Angeles International Airport, used the Polyl-Gard 575FC (fast cure) traffic coating system. Best Contracting Services was able to install over 600,000 square feet of the Polyprime 2180SC primer, PC 260 basecoat and Poly-I-Gard 295 top coat.

Products Used:

Poly-I-Gard 575FC Vehicular Traffic Deck System:

- Polyprime 2180SC primer at 10–12 mils WFT
- PC-260 basecoat at 24-26 mils WFT
- Poly-I-Gard 295 top coat (two coats) at 12–14 mils WFT each, with sand broadcast to refusal in the first layer



Photo 4

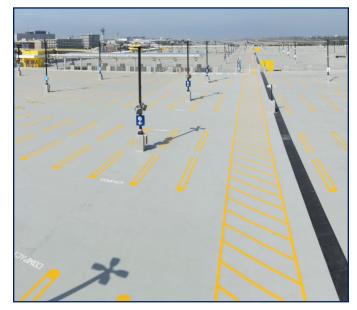


Photo 5



Photo 1



Photo 2



